

# Slimline CineCurve

---

The CineCurve features a native 2.40:1 image area allowing full enjoyment and flexibility when watching movies in super-wide screen formats, and masks to conform to HDTV and NTSC TV formats




# Slimline CineCurve


Many Hollywood blockbusters are produced in formats such as Cinemascope where the movie is 2.35 times wider than it is high. When watching this aspect ratio on a 16:9 screen, 33% of the pixels are used to create annoying black bars, therefore reducing your image resolution.

Designed for use with an anamorphic lens, the CineCurve features a native 2.40:1 image area allowing full enjoyment and flexibility when watching movies in super-wide screen formats. Maintaining a constant vertical height, two electronically controlled masking panels glide in from the left and right to create the perfect image area when viewing different types of media or movies filmed in various aspect ratios.

The Slimline CineCurve is now applicable for smaller home theater rooms due to its newly re-designed housing that is 2" narrower on each side. Previously when measuring the installation of a CineCurve one would have to take in to account 18" for the housing plus the image width. The new Slimline CineCurve unit reduces the unit width to 13"+ image width. The size reduction of the housing unit means that customers can have an even larger image area in the space and that rooms that may not have been able to accommodate current model are now able to thanks to its new Slimline CineCurve design.

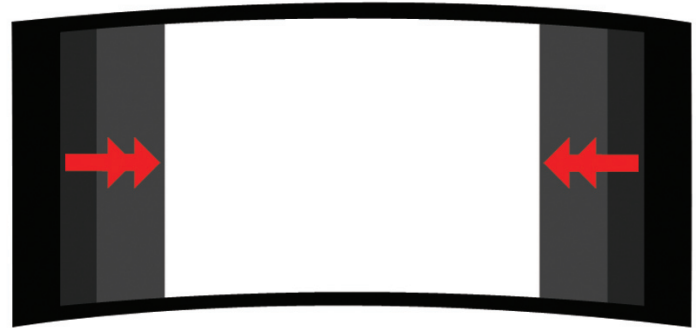

Vertical side panels glide in from the left and right to create the perfectly masked image area.

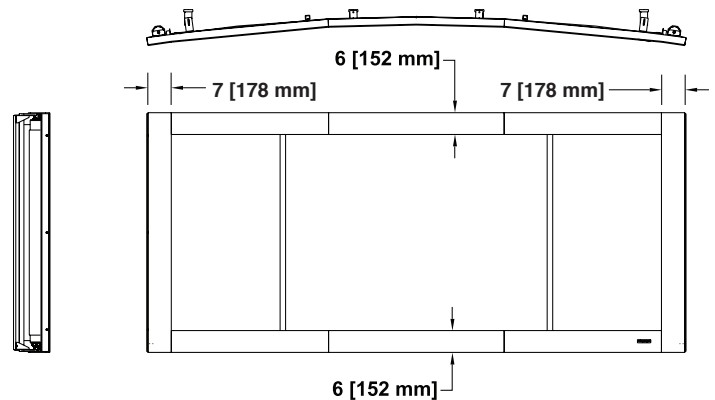

## SPECIFICATIONS

Curved aluminum extrusion frame	Included
Vertical masking panels	Included
VeLux™ appliqué finish	Included
Specialized snap-fastening system	Included

## MATERIAL

Front projection material	Included
Rear projection material	Optional

## PERFORATIONS

Microperf X2	Optional
Acoustically transparent masking panels	Optional

## MOTORS (2 motors)

120 Volt	Included
220 Volt	Optional

## CONTROL

B.R.I.C. (binary reciprocal intelligent control)	Included
--	----------

\*Includes IR remote and key pad

## MOUNTING

Wall mount	Included
Aperture	Optional

## FRAME DIMENSIONS

Height	Image Height + 12" (305 mm)
Width	Image Width + 13" (330.2 mm)

(VeLux™ adds .125 to frame o.d.)

## FRAME DIMENSIONS

Minimum image size	40" x 96" (1016 mm x 2438 mm)
Maximum image size	57.5" x 138" (1461 mm x 3505 mm)

## RADIUS

Up to 108 wide	30'
Up to 138 wide	40'



RESIDENTIAL

Find your local representative at [www.stewartfilmscreen.com/rep](http://www.stewartfilmscreen.com/rep)