


FilmScreen 100

Gain: 1.0, Max. Size: 40'x90'

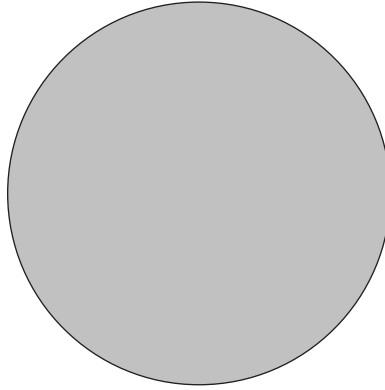

Ambient light rejecting, rear projection material


Stewart
F I L M S C R E E N

The Reference for Stunning™

Producers of Professional Projection Screens

Material Type	Flexible Rear	Minimum Throw Distance	1.3 x Image Width
Maximum Size	40'(H) x 90'(W)	Edge Blending Properties	NA
Peak Gain	1.0	Passive 3D Use	Yes
Half Gain	39°	Lay Flat Quality	Excellent
Ambient Light Rejection Value	85%	Flame Resistance	Yes
Ambient Light Resistance	Excellent	Perforation Options	No

A flexible, rear projection screen material formulated with a neutral density gray tint for enhanced contrast, while still preserving an excellent viewing cone. **FilmScreen 100** features a gray tint to provide needed contrast when ambient light is present. The fabric will work well with most focal lengths and provides a wide viewing angle for large audiences. Specially formulated for anti hot spotting, **FilmScreen 100** is a great choice when venue stage lighting is present.

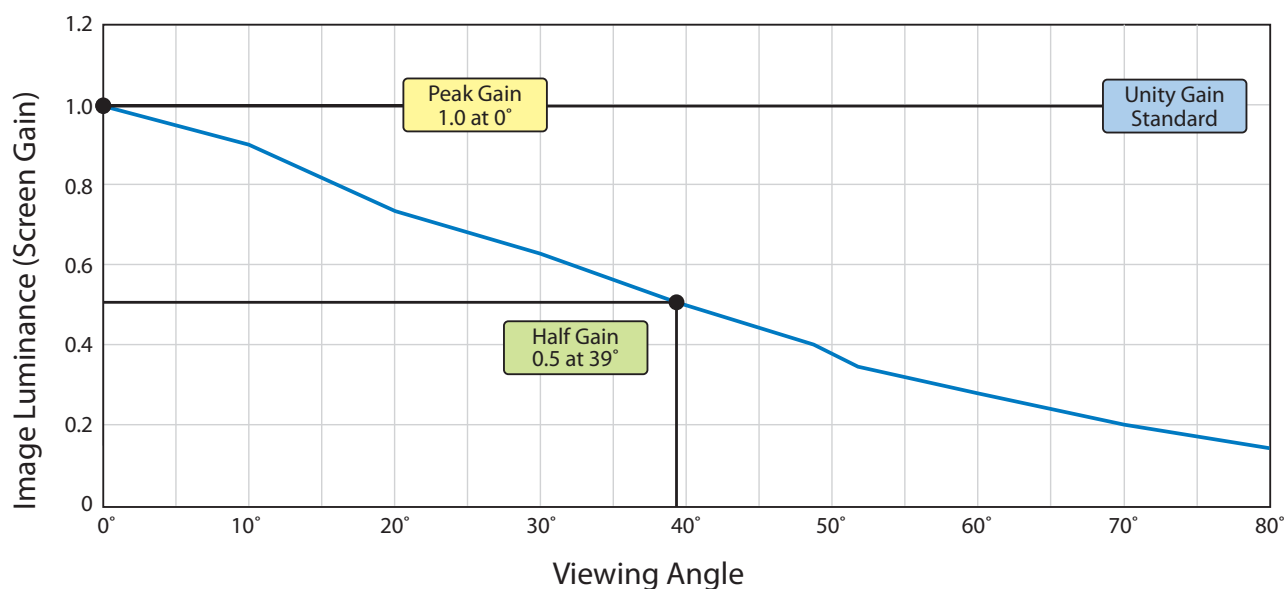

Stewart
F I L M S C R E E N

The Reference for Stunning™

www.stewartfilmscreen.com

1161 W. Sepulveda Blvd., Torrance CA 90502 USA | 800.762.4999 | Tel: 310.784.5300 | Fax: 310.326.6870 | Email: request@stewartfilmscreen.com

2021® Stewart Filmscreen. Specifications are subject to change without notice.