AT 3.0


Fixed Frame Screen with Lace and Grommets



When you need to go big...really big





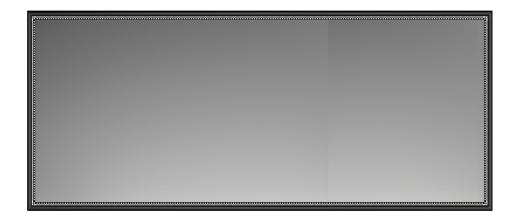

AT 3.0 SPECIFICATIONS

ATTRIBUTES	AT 3.0	AT 3.0 M	AT 3.0 C	AT 3.0 CM	AT 3.0 W	AT 3.0 CW
Base MSRP (USA Only)*	\$26,257	\$34,353	\$30,272	\$36,831	\$27,828	\$34,393
Max. Image Height	480"	480"	480"	480"	480"	480"
Max. Image Width	1080"	1080"	1080"	1080"	1080"	1080"
Max. Image Diagonal	1181"	1181"	1181"	1181"	1181"	1181"
Max. Frame Height	496"	496"	496"	496"	480"	480"
Max. Frame Width	1096"	1096"	1096"	1096"	1080"	1080"
Frame Depth (No Mounting)	3"	3"	3"	3"	3"	3"
Mounting Options	Wall / Hanging / Aperture					
Perforation Options	CinemaPerf					

^{*}Established by quoting the smallest size screen available without any upgrades or optional features.

SCREEN MATERIAL OPTIONS

FRONT PROJECTION

FireHawk LS
Gain: 1.1, Max. Size: 40'x9









Gain: 3.0, Max. Size: 40'x90'



Gain: 2.3, Max. Size: 40'x90'



UltraMatte 130
Gain: 1.3, Max. Size: 40'x90'



REAR PROJECTION

AeroView 70
Gain: 0.7. Max. Size: 40'x90'

AeroView 90
Gain: 0.9, Max. Size: 40'x90







Producers of Professional Projection Screens

The AT 3.0 frame uses a 3 inch diameter aluminum tube and works with flexible, front projection fabrics up to 40 by 90 feet. For rear projection, aperture mounted applications, the AT 3.0 will work with the same limits and will also free stand to create images up to 13 by 23 feet. The AT 3.0 utilizes shock cord and S-hook fabric mounting — super quick, and super accurate. These fixed framed screens can be configured to wall mount, stand mount, or be used as a flyer. As shown above, the complete line can be ordered bare bones with frame and lacing for use behind set pieces, or the screen can be masked with an overscan, stray light absorbing border. Need a curved screen? The AT 3.0 can be curved to any specified radius down to 12 feet.



The Reference for Stunning™

www.stewartfilmscreen.com