

Director's Choice

Four-Way, Continuously Variable Masking Screen System




The ultimate marriage of the world's finest screen material
and the most precise masking system



Stewart
FILMSCREEN

The Reference for Stunning™

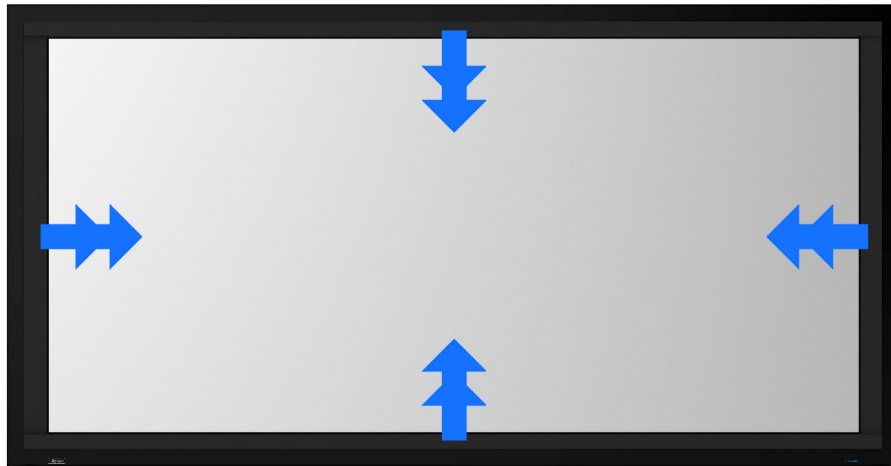

SCREEN MATERIAL OPTIONS

FRONT PROJECTION

- FireHawk G5**
Gain: 1.1, Max. Size: 8'6" x 120'
- GrayHawk G4**
Gain: 0.9, Max. Size: 8'6" x 120'
- GrayMatte 70**
Gain: 0.7, Max. Size: 40' x 90'
- Phantom HALR Plus**
Gain: 1.3, Max. Size: 40' x 90'
- Phantom HALR**
Gain: 1.0, Max. Size: 40' x 90'
- Silver 3D**
Gain: 3.0, Max. Size: 40' x 90'
- Silver 5D**
Gain: 2.4, Max. Size: 40' x 90'
- SnoMatte 100**
Gain: 1.0, Max. Size: 40' x 90'
- StudioTek 100**
Gain: 1.0, Max. Size: 40' x 90'
- StudioTek 130 G4**
Gain: 1.3, Max. Size: 8'6" x 120'
- UltraMatte 130**
Gain: 1.3, Max. Size: 40' x 90'
- UltraMatte 150**
Gain: 1.5, Max. Size: 40' x 90'

DIRECTOR'S CHOICE SPECIFICATIONS

ATTRIBUTES	DC EVO	DC 100	DC 200	DC 300
Base MSRP (USA Only)*	\$37,811	\$37,811	\$51,500	\$65,149
Max. Image Height	96"	84"	121 ¼"	168 ½"
Max. Image Width	192"	168"	216"	300"
Max. Image Diagonal	215"	188"	248"	344"
Max. Frame Height	109"	104"	150"	209"
Max. Frame Width	205"	188"	248"	340"
Frame Depth	16 ½"	10 ¼"	12 ¼"	16 ¼"
Horz. Border Height	6 ½"	10"	14"	20"
Vert. Border Height	6 ½"	10"	16"	20"
Mounting Options	Aperture, Floor			
Perforation Options	MicroPerf X ² THX Ultra / CinemaPerf			
Control Systems	CVM			
Max. Presets	24			
Motors	120V / 220-240V			

*Established by quoting the smallest size screen available without any upgrades or optional features.

Producers of Professional Projection Screens

Stewart
FILMSCREEN

The Reference for Stunning™

www.stewartfilmscreen.com

1161 W. Sepulveda Blvd., Torrance CA 90502 USA | 800.762.4999 | Tel: 310.784.5300 | Fax: 310.326.6870 | Email: request@stewartfilmscreen.com

©2022 Stewart Filmscreen. Specifications are subject to change without notice.